


威谱




对讲控制器

①

ALARM


PWR

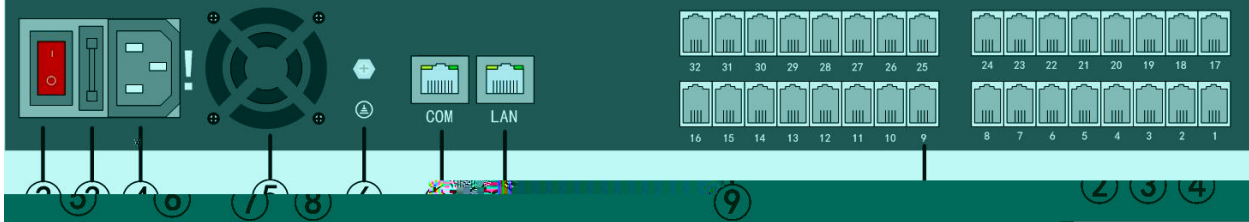

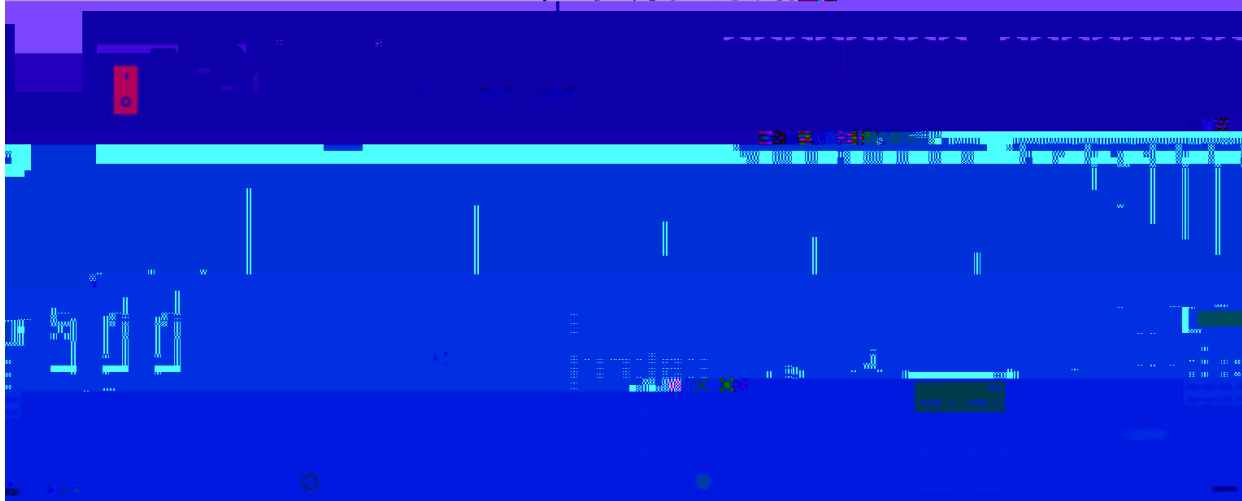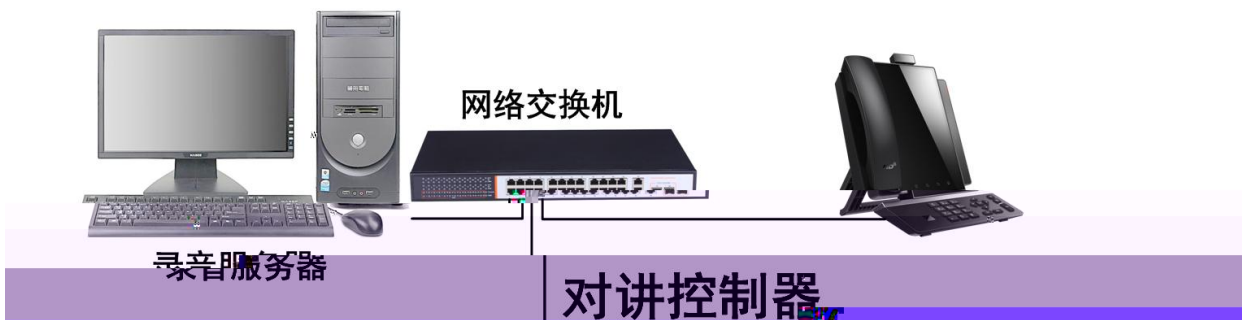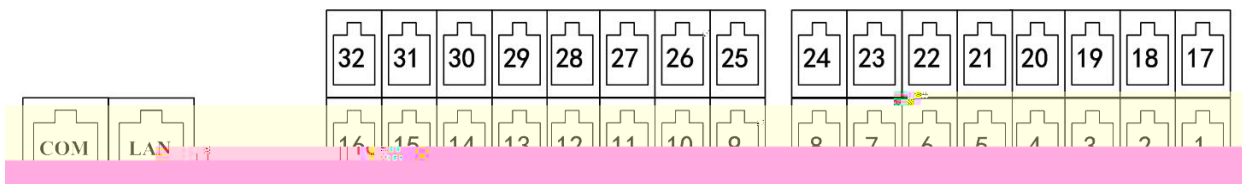

使用下面的 IP 地址(S):

IP 地址(I):	192 . 168 . 0 . 236
子网掩码(U):	255 . 255 . 255 . 0
默认网关(D):	192 . 168 . 0 . 1

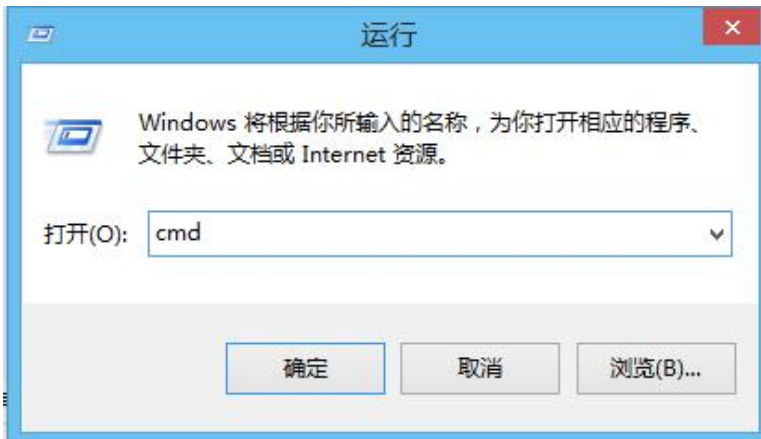

```
[ \ ] $>password
用户名 [admin]:admin
新密码:*****
再次确认新密码:*****
...OK!
[ \ ] $>reboot
是否重新启动系统 [Y/N]? y
```


```
[ \ ] $>setnet
目标机MAC地址 [3c:d1:6e:01:f3:e5]:
目标机IP地址 [192.168.0.177]: 192.168.0.235
目标机子网掩码 [255.255.255.0]:
网关IP地址 [ ]:
EraseSector:63 Address:53f0000ES..
系统重新启动后有效!
[ \ ] $>reboot
是否重新启动系统 [Y/N]? y
```

```
[ \ wintalk ] $>modmodle
标签          使用该标签的端口
=====
标签 1        1-2-3-4-5-6-7-8-9-10-11-12-30-31
标签 2
标签 3        13-14-15-16-17-18-19-20-21-22-23-24-25-26-27-28-29-32
设置格式:"标签编号:端口号-端口号-端口号",设置完成后输入0退出,按q退出设置
例      如:1:1-2-3-4-5-6-7-8
表号:q
是否保存 [Y/N]? y
```

```

[\wintalk] $>modkey
热键编号-> 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23
24 25
=====  == == == == == == == == == == == == == == == == == == == == == == == ==
== ==
标签 1    1  2  3  4  5  6  7  8  9 10 * * * * * * * * * * * * * * * * * * * * * *
* *
标签 2    1  2  3  4 * * * * * * * * * * * * * * * * * * * * * *
* *
标签 3    11 12 13 14 * * * * * * * * * * * * * * * * * * * * * *
* *
设置格式:"标签编号:按顺序输入热键对应的端口",设置完成后输入q回车保存温
如:1:1-2-3-4-5-6-7-8
:q
保存[Y/N]?y

```

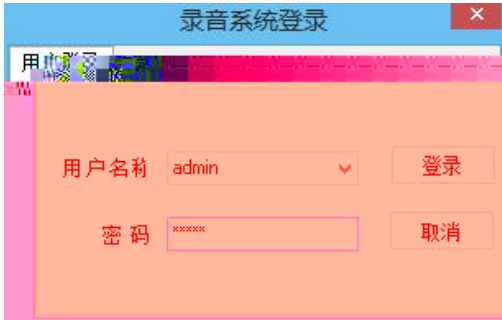

主叫	被叫	通话开始时间	通话结束时间	通话时长	转移自	转移到
00	00	2016-11-10 16:41:14	2016-11-10 16:59:58	00:18:44		
00	00	2016-11-10 16:00:01	2016-11-10 16:40:01	00:40:00		
00	00	2016-11-10				

